

SYSTEM DESCRIPTION

Armor-Rez Jet Deck 200 is a three-coat system engineered to meet the Unified Facilities Guide Specification 09 67 23.15 requirements for thin mil flooring systems typical of aircraft maintenance hangars. This system is comprised of an epoxy primer, epoxy Basecoat and chemical resistant urethane topcoat that will provide superior chemical and abrasion resistance. Typical system thickness is between 12 mils and 20 mils.

USES

- Aircraft maintenance hangars
- Equipment maintenance shops
- Mechanical rooms
- In light to medium duty manufacturing


ADVANTAGES

- High Solids, Low VOC versions available
- Moderate Impact Resistant
- Abrasion Resistant
- Chemical Resistant
- Available in Fast Cure Formulas

COLORS

APF ARMOR-REZ Jet Deck 200 is 12 Standard Colors, Safety Red, Safety Yellow, and Safety Blue.

TYPICAL SYSTEM BUILD

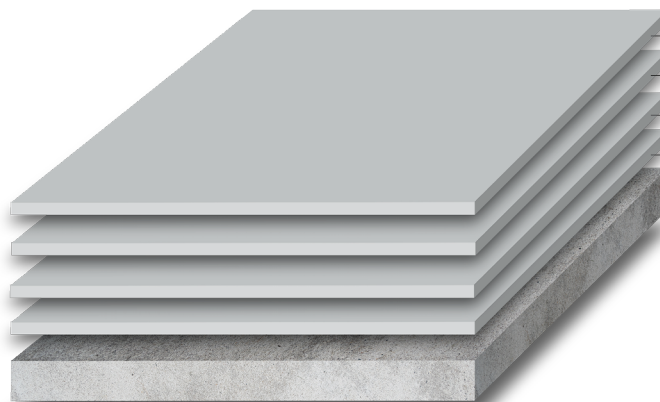

TopCoat: Polyurethane 100 or Polyurethane 100 VOC pigmented
Basecoat: Epoxy 400 pigmented
Primer: Epoxy 400 pigmented
Patching, Filling, Moisture Vapor: Epoxy 300 Flex Paste, APF VaporSolve® System

Note: Diagram not to scale

TECHNICAL DATA

Compressive Strength (ASTM C-579)	13,500 psi
Tensile Strength (ASTM C-307)	2,500 psi
Flexural Strength (ASTM C-580)	4,000 psi
Hardness, Shore D (ASTM D-2240)	80-90
Impact Resistance (ASTM D-2794)	120 in-lb
Tabor Abrasion (1000 gm. Load, 1000 cycles, CS 17 wheel)	34 Mg. Loss
Flammability (ASTM E-648)	Class 1
Coefficient of friction (ANSI A326.3)	0.42
Water Absorption (ASTM C-413)	0.2%
Adhesion (ASTM D-7234)	350 psi

Refer to product data sheet of individual system component for more information.

TYPICAL SYSTEM BUILD

COAT	PRODUCT	THICKNESS/COVERAGE
Patching, Filling, Moisture Vapor	APF Epoxy 300 Flex Paste, APF VaporSolve System	As required
Primer	APF Epoxy 400 pigmented	200 sqft/gallon 8 mils WFT
Basecoat	APF Epoxy 400 pigmented	80-200 sqft/gallon 8-20 mils WFT
Topcoat	APF Polyurethane 100/100 VOC pigmented	250-300 sqft/gallon 5-6 mils WFT*

*Topcoat coverage determines final texture.

1.0 Concrete Moisture

It is the applicators responsibility to test for concrete moisture in accordance with ASTM F2170-19. If moisture is indicated to be more than 85%, apply APF VaporSolve system in accordance with the published system data sheet. Consult APF Technical Service for further information.

2.0 Surface Preparation

Concrete must be cured for at least 30 days be clean, structurally sound, and free of wax, loose coatings or curing compounds. Concrete should be properly prepared to achieve a surface Minimum Texture of ICRI/CSP 2-3. Refer to ICRI technical guidelines 310-330 Selecting and specifying concrete surface preparation for sealer, coatings, polymer overlays, and concrete repair. Vacuum the prepared concrete surface to remove all dust. Acid etching is not recommended and will void manufacturers' warranty.

3.0 Crack Repair

After the initial preparation has been completed, inspect the surface for indentations and holes. These must be filled prior to application using Epoxy 300 Flex Paste. After mixing Epoxy 300 Flex Paste according to the product data sheet, use the Epoxy 300 Flex Paste immediately. Spread the product with a flat trowel, margin tool, or broad putty/plaster knife. Gunning is not recommended for this material.

Apply to fill joint completely. Apply additional material if product settles into joint below the concrete surface. Cured product must be level with concrete surface. Allow to cure completely prior to applying primer.

4.0 Priming

After any patchwork/crack repair has cured, apply one coat of Epoxy 400 after mixing according to mixing instructions on the applicable product data sheet. Apply material onto surface immediately after mixing with a squeegee, back roll using a quality solvent resistant 3/8-inch nap roller cover. Apply at a rate of 200 sqft/gallon at 8 mils WFT.

A "wet edge" is recommended when applying product, do not attempt to roll over material that has begun to set. An applicator wearing spiked shoes will back roll the wet material using a quality solvent resistant 3/8-inch nap roller cover to distribute the material uniformly. **The material must be thoroughly rolled twice to achieve optimal substrate wetting {using North-South, East-West Method.}.**

Epoxy 400 must be recoated within a 24-hour recoat window. If this window is exceeded, the surface must be abraded with 80-100 grit to achieve a uniform, gloss-free, and dust-free texture before recoating.

5.0 Application of the Basecoat

After mixing the Epoxy 400 according to the product data sheet, apply Epoxy 400 onto surface immediately after mixing with a squeegee, back roll with using a quality solvent resistant 3/8-inch nap roller cover. Apply at a rate of 80-200 sqft/gallon at 8-20 mils WFT. A "wet edge" is recommended when applying product, do not attempt to roll over material that has begun to set. An applicator wearing spiked shoes will back roll the wet material using a quality solvent resistant 3/8-inch nap roller cover to distribute the material uniformly. **The material must be thoroughly rolled twice to achieve optimal substrate wetting {using North-South, East-West Method.}**

6.0 Application of the Topcoat

Epoxy 400 must be recoated within a 24-hour recoat window. If this window is exceeded, the surface must be abraded with 80-100 grit to achieve a uniform, gloss-free, and dust-free texture before recoating.

Mix the Polyurethane 100 or 100 VOC according to the product data sheet. Apply the material onto the surface immediately after mixing with a brush or roller, and back roll using a quality solvent-resistant 3/8-inch nap roller cover at a rate of 250-300 sq. ft./gallon (5-6 mils WFT). DO NOT allow puddling or accumulation in joint areas. A "wet edge" is recommended when applying the product; do not attempt to roll over material that has begun to set. An applicator wearing spiked

APPLICATION INSTRUCTIONS

6.0 Application of the Topcoat (Cont.)

shoes will back roll the wet material with a quality solvent-resistant 3/8-inch nap roller cover to distribute it uniformly. **The material must be thoroughly rolled twice to achieve optimal substrate wetting {using North-South, East-West Method.}**

APF_ArmorRez_Jet_Deck_200_System_Data_06.18.25

STANDARD WARRANTY STATEMENT

ICP Construction, Inc. ("we" "us" or "our"), manufacturer of Arizona Polymer Flooring, warrants that the product is produced within specifications and is free from defects in material only. No warranty shall be in effect until our Terms and Conditions of Sales (<https://www.icpgroup.com/wp-content/uploads/ICP-Group-Terms-and-Conditions-of-Sale.pdf>) are met, including payment and cooperative promotional considerations. We warrant that the covered product is free of defects in material only and suitable for the specified purpose for a period of one (1) year from the date of shipment, provided the product is (a) installed within its published shelf life, in strict conformance with specifications, and (b) handled, stored, mixed, and applied in accordance with our written instructions. It is your responsibility to initiate any claim against this warranty within the time frame specified below. If we determine that the product meets the requirements of this warranty, then we will, at our sole discretion, either refund the purchase price of the product or provide replacement product, in each case not to exceed the affected area as determined by our authorized technical representative. To obtain replacement or refund you must (a) provide timely written notice to us specifying in detail the non-conformity suspected (no later than five (5) working days after discovery), and (b) provide proof of purchase. We reserve the right to inspect the product prior to replacement. EXCEPT FOR THE EXPRESS WARRANTY ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. IN NO EVENT SHALL WE OR OUR AFFILIATES BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES OF ANY NATURE, REGARDLESS OF THE FORM OF ACTION OR THEORY OF LAW, INCLUDING, WITHOUT LIMITATION, BREACH OF ANY OBLIGATION OR WARRANTY IMPOSED ON US HEREUNDER OR IN CONNECTION HERewith, EVEN IF WE HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES IN ADVANCE AND EVEN IF A REMEDY SET FORTH HEREIN IS FOUND TO HAVE FAILED OF ITS ESSENTIAL PURPOSE. "CONSEQUENTIAL DAMAGES" SHALL INCLUDE, WITHOUT LIMITATION, LOSS OF USE, INCOME, OR PROFIT, OR LOSSES SUSTAINED AS THE RESULT OF INJURY TO ANY PERSON, OR LOSS OF OR DAMAGE TO ANY PROPERTY (INCLUDING, WITHOUT LIMITATION, PROPERTY HANDLED OR PROCESSED THROUGH THE USE OF THE PRODUCTS), DAMAGES OR LOSSES RESULTING FROM CLAIMS OF OTHER PERSONS AGAINST YOU, OR DAMAGES OR LOSSES SUSTAINED AS THE RESULT OF WORK STOPPAGE, OR REMOVAL AND REPLACEMENT COSTS AND COSTS OF LABOR. IN NO EVENT SHALL OUR LIABILITY ARISING IN CONNECTION WITH OR UNDER THIS WARRANTY (REGARDLESS OF THE FORM OF ACTION OR THEORY OF LAW) EXCEED THE AMOUNT PAID BY YOU FOR THE DEFECTIVE PRODUCT ONLY. THIS LIMITED WARRANTY PROVIDES YOUR EXCLUSIVE REMEDY FOR ANY DEFECT IN THE PRODUCT. If you do not agree with these terms, you may return the product within thirty (30) days of purchase for a full refund, provided the product is not opened, altered, or adulterated in any manner, less any shipping and handling charges of any sort. Use of the product, or retention of the product beyond thirty (30) days, constitutes your acceptance of this limited and exclusive warranty. No customer, distributor, or representative of ours is authorized to change or modify the published data sheets or this warranty in any way. No one is authorized to make oral warranties on behalf of us.